


SE-3T-GD

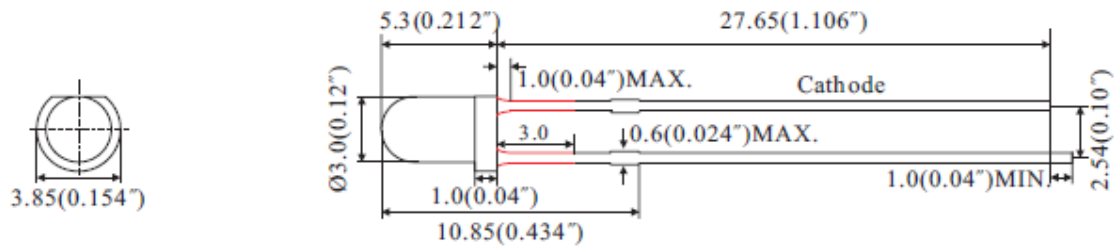

Dice		Lens Color	(If=20mA)	Viewing Angle
Raw Material	Emitted Color		TYP. (mcd)	
GaP	Yellow Green	Green Diffused	80	30°

Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Maximum Rating	Units
Power Dissipation	P _D	65	mW
Peak Forward Current ⁴	I _{FP}	100	mA
Forward Current	I _F	25	mA
Reverse Voltage	V _R	5	V
Capacitance	C	45	pF
Operating/Storage Temperature	T _A /T _{STG}	-40°C to +85°C	
Lead Solder Temperature	T _{SOL}	260°C for 3 Seconds	

Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	TYP.	MAX.	Units	Test Condition
Peak Wavelength	λ _{peak}	574	-	nm	I _F =20mA
Dominant Wavelength	λ _d	570	-	nm	I _F =20mA
Spectral Line Half-width	Δλ	30	-	nm	I _F =20mA
Forward Voltage	V _F	2.20	2.60	V	I _F =20mA
Reverse Current	I _R	-	10	uA	V _R =5V

Notes:

1. All dimension are in millimeter (inches);
2. Tolerance is ±0.25mm(0.01") unless otherwise specified;
3. Not recommend to solder within 3mm from the resin;
4. 1/10 Duty Cycle, 0.1ms Pulse Width.